




MurCal Inc.
41343 12th Street West
Palmdale, CA 93551
(661) 272-4700
sales@murcal.com
www.murcal.com

ElectroDyne

Specifications

MODEL E250-24, 7.3" DIA., HIGH POWER AND COACH AIR COOLED, BELT DRIVEN

NET RATED AMPERES	250 AMPERES
RPM @ RATED AMPERES	2650
PRESET VOLTAGE RANGE	25.5 - 30.0 VOLTS DC
FULL LOAD VOLTAGE	27.8 (WITH 28V.D.C. PRESET VOLTAGE)
GROUNDING OPTIONS	ISOL., NEG., POS.
ROTATION	BIDIRECTIONAL
SHAFT DIAM. (PULLEY I.D.)	7/8"
RPM TERMINAL	STANDARD
VOLTAGE REGULATOR	REMOTE, ADJUSTABLE, SELF OR IGNITION EXCITED
DIODE CONSTRUCTION	INDIVIDUALLY REPLACEABLE
DIODE CAPACITY, AMPERES	900

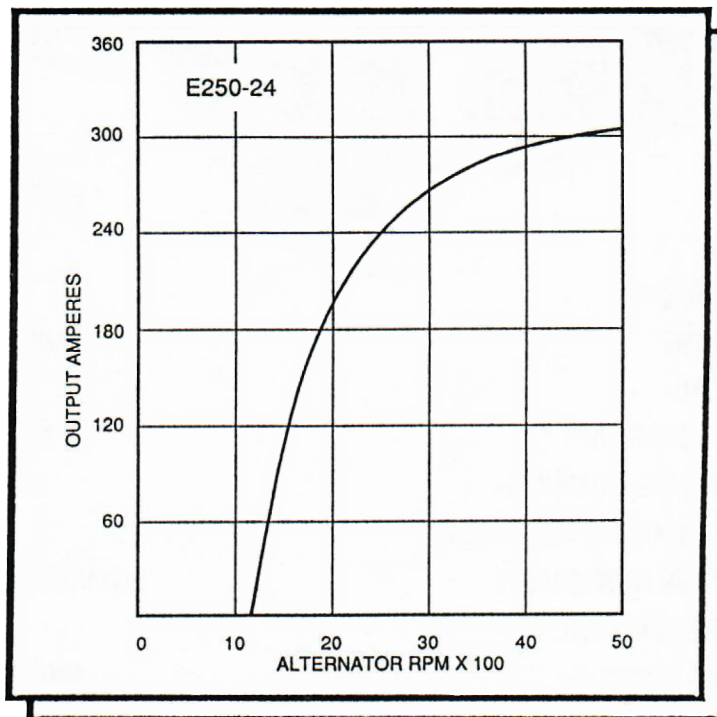

NOTE: SPECIFICATIONS AND PERFORMANCE DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.
CERTIFIED SPECIFICATIONS AND PERFORMANCE DATA ARE AVAILABLE ON REQUEST.