

Tachometers and Tach/Hourmeters – AT and ATH Series



Features

- 4000 RPM –0 to 100,000 hours
- Sensing from Magnetic Sensor, Battery Charging Alternator or Ignition Signal
- High Visibility Analog Readout
- Air Core Movement
- Easy Calibration through Dip Switches
- Through Dial Lighting
- Powered by 11-28 VDC Battery Available



* Products covered by this bulletin comply with EMC Council directive 89/336/EEC regarding electromagnetic compatibility except as noted.

The AT Series tachometers are rugged, transistorized instruments with solid-state circuitry for indication of engine RPM. They are equipped with a bracket for mounting into a standard 3- 3/8 in. (86 mm) dash mounting hole. A full 270° sweep of the pointer gives an accurate indication on a large easy-to-read scale and the dial can be illuminated for night reading. The ATH Series models are also equipped with hourmeter to record the elapsed running time of an engine.

Models available for Alternator, Magnetic Sensor or Ignition signal These instruments are designed to function from pulses generated by an alternator with 4, 8, 12, 14, or 16 poles on the rotor. The pulses can also be obtained from the ring gear of an engine by means of an **electromagnetic sensor** (magnetic pickup). Murphy's magnetic sensor driven models are designed to function with flywheels having anywhere from 50 to 304 teeth. **Ignition signal** model available for 4, 6 or 8 cylinder, spark-ignited engines. All models are for negative ground, positive ground or isolated electrical systems and are protected against reverse polarity hookup.

All models are powered by a 11-28 VDC battery and are reverse polarity protected.

Series Models

ATS Series Magnetic Sensor Signal Tach

50-304 flywheel teeth* 11-28 VDC, 2733 Hz to 13.62 kHz @ 4000 RPM

ATHS Series Magnetic Sensor Signal Tachometer/Hourmeter

50-304 flywheel teeth* 11-28 VDC, 2733 Hz to 13.62 kHz @ 4000 RPM

* To determine pulses per engine revolution, work the formulas on the back page and use the pulses per revolution number to determine if the tachometer can be used for your application.

ATA Series Alternator Signal Tachometer

3-32 pulses* 12 VDC, 137 to 1330 Hz @ 4000 RPM

ATHA Series Alternator Signal Tachometer/Hourmeter

3-32 pulses* 12 VDC, 137 to 1330 Hz @ 4000 RPM or 193 to 1815 Hz @ 4000 RPM

ATHI Series Ignition Signal Tachometer/Hourmeter

4, 6 or 8 cylinder engines @ 4000 RPM


Bezel Styles



Applications

These tachometers are specially designed for use on truck, marine, industrial, or stationary engines.

Dimensions

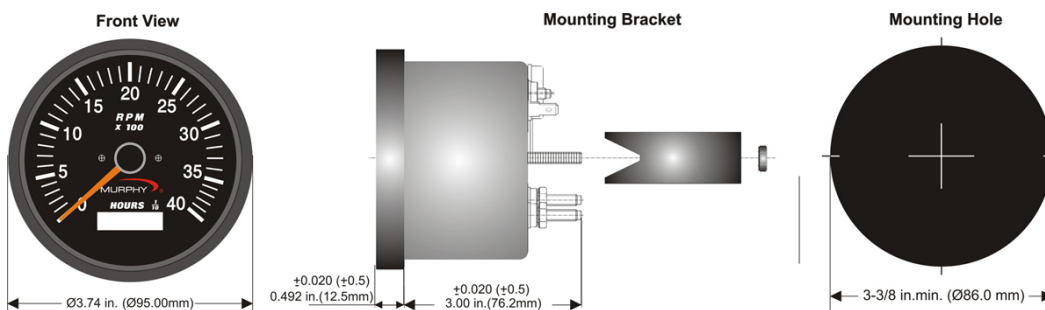

In order to consistently bring you the highest quality, full featured products, we reserve the right to change our specifications and designs at any time. MURPHY products and the Murphy logo are registered and/or common law trademarks of Murphy Industries, LLC. This document, including textual matter and illustrations, is copyright protected by Murphy Industries, LLC, with all rights reserved. (c) 2011 Murphy Industries, LLC.

Specifications

Magnetic Sensor Driven Models

Power Input: 11-28VDC (70mA – 120mA except lamp load)

Backlight: 3.4W T-10 wedge base bulb

RPM Input Signal Voltage: 1.5Vrms minimum

Accuracy: Tachometer: +2% full scale

Hourmeter: +0.01% hours, +1 count

Temperature Range: -40°C to +82°C (no permanent damage shall occur)

Dial (Face Plate): 270° sweep with white numerals (over black background)

Bezel: 304 stainless steel for bright and IS 513 E.E.E. CRCA steel for black

Scale: 0-4000RPM

Case Material: Plastic

Hourmeter Range: 99999.9 hours in 0.1 increments.

Alternator Driven and Ignition Driven Models

Power Input: 11-28VDC (70mA-120mA except lamp load)

Backlight: 3.4W T-10 wedge base bulb

RPM Input Signal Voltage: V low: 0.5V max, V high: 8.0V min.

Accuracy: Tachometer: +2% full scale

Hourmeter: +0.01% hours, +1 count

Temperature Range: -40°C to +82°C (no permanent damage shall occur)

Dial (Face Plate): 270° sweep with white numerals (over black background)

Bezel: 304 stainless steel for bright and IS 513 E.E.E. CRCA steel for black

Scale: 0-4000RPM

Case Material: Plastic

Hourmeter Range: 99999.9 hours in 0.1 increments.

How to Order

Order the Tachometer or Tachometer/Hourmeter by model number.

Magnetic Sensor Tachometer 4000 RPM; 50 - 304 flywheel teeth 11-28 VDC

Model #	Designation
ATS-40	Bright Stainless Steel Bezel
ATS-40-A	Black Stainless Steel Bezel
ATS-40-B	SAE Bright Stainless Steel Bezel
ATS-40-C	SAE Black Stainless Steel Bezel

Magnetic Sensor Tach/Hourmeter 4000 RPM; 50-304 flywheel teeth 11-28 VDC

ATHS-40	Bright Stainless Steel Bezel
ATHS-40-A	Black Stainless Steel Bezel
ATHS-40-B	SAE Bright Stainless Steel Bezel
ATHS-40-C	SAE Black Stainless Steel Bezel

Alternator Signal Tachometer 4000 RPM; 3 - 32 pulses 11-28 VDC

ATA-40	Bright Stainless Steel Bezel
ATA-40-A	Black Stainless Steel Bezel
ATA-40-B	SAE Bright Stainless Steel Bezel

Alternator Signal Tach/Hourmeter 4000 RPM; 3 - 32 pulses 11-28 VDC

ATHA-40	Bright Stainless Steel Bezel
ATHA-40-A	Black Stainless Steel Bezel
ATHA-40-B	SAE Bright Stainless Steel Bezel
ATHA-40-C	SAE Black Stainless Steel Bezel

CALL MURCAL TO PLACE YOUR ORDER

P:(661)272-4700 F:(661)947-7570

www.murcal.com

e-mail: sales@murcal.com



Warranty - A limited warranty on materials and workmanship is given with this FW Murphy product.
A copy of the warranty may be viewed or printed by going to <http://www.fwmurphy.com/warranty>